


Individual mounting

Inline	Sub-base non "plug-in"
--------	------------------------

Series

Manifold mounting

Stacking	Manifold base "plug-in"
----------	-------------------------

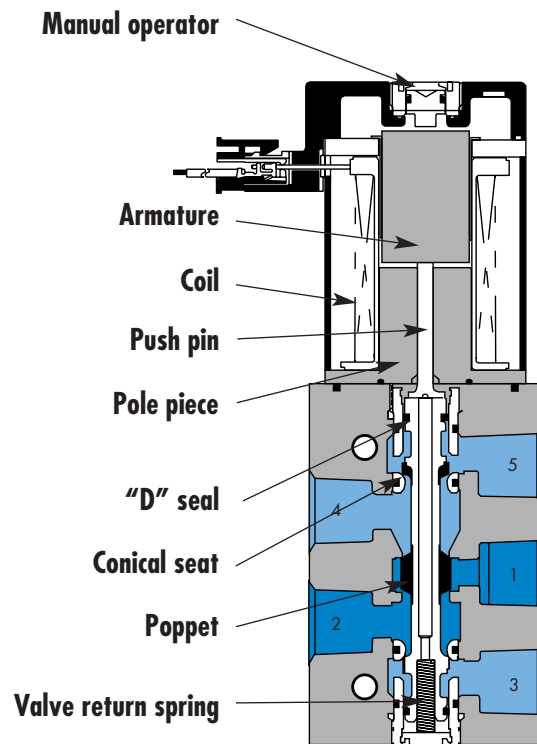

33

34

36

32

37

38

52

67

69

44

46

46

42

42

47

48P

48

48

48

400

92

92

SERIES FEATURES

- Short stroke solenoid produces high energization shifting force.
- High force return spring due to high force solenoid maximizes both energization and de-energization shifting forces.
- Built-in wear compensation - valve stroke is shorter than solenoid stroke.
- Four (4) bonded balanced poppets on a one-piece valve stem.
- End poppets seal first on conical seats and cushion inlet poppet, eliminating cutting.
- Exhaust seals are not under inlet pressure thus reducing friction.
- Short stroking balanced poppet allows for direct solenoid operation with high shifting forces, minimized friction, fast response and high flow in a small package.

93

ISO 01

ISO 02

ISO 1

ISO 2

ISO 3



Direct solenoid and solenoid pilot operated valves

Function	Port size	Flow [Max]	Individual Mounting	Series
5/2	1/8" - 1/4"	0.5 C_v	Inline	

OPERATIONAL BENEFITS

- Short stroke solenoid produces high energization shifting force.
- High force return spring due to high force solenoid maximizes both energization and de-energization shifting forces.
- Built-in wear compensation – valve stroke is shorter than solenoid stroke.
- Four bonded balanced poppets on a one-piece valve stem.
- End poppets seal first on conical seats and cushion inlet poppet, eliminating cutting.
- Exhaust seals are not under inlet pressure thus reducing friction.
- Integral non-rising flow controls available on inline models.
- Short stroking balanced poppet allows for direct solenoid operation with high shifting forces, minimized friction, fast response and high flow in a small package.



- 33
- 34
- 36
- 32
- 37
- 38
- 52
- 67
- 69
- 44
- 46
- 42

HOW TO ORDER

Port size	Without flow controls	With flow controls
1/8" NPTF	47A-AA0-H XXX-XXX	47A-BA0-H XXX-XXX
1/4" NPTF	47A-AB0-H XXX-XXX	47A-BB0-H XXX-XXX

SOLENOID OPERATOR >

H **XXX-XXX***

XX Voltage	X Lead Wire length	X Manual operator	XX Electrical connection
DA 24 VDC (5.2W)	A 18"	1 Non-locking recessed	MA Plug-in wire assembly
DB 24 VDC (2.4W)	B 24"	2 Locking recessed	MC Plug-in wire assembly with light
DC 24 VDC (1.8W)	C 36"		BA Flying leads
DD 24 VDC (1.0W)			BC Flying leads with light
AA 120 VAC (6.7W)			MT Plug-in wire assembly with rectifier & light

* Other options available, see page 315.
Note: AC voltage requires connector with rectifier.

LATCHING OPERATOR >

L **XXX-XXX***

XX Voltage	X Lead Wire length	X Manual operator	XX Electrical connection
DA 24 VDC (5.2W)	A 18"	0 No operator	BA 2 Wire Flying leads
DF 12 VDC (5.2W)	B 24"		BJ 4 Wire Flying leads
	C 36"		LA 3 Wire Plug-in (Polarity switching cover)
			MA 2 Wire Plug-in
			ME 4 Wire Plug-in

* Other options available, see page 319.

OPTIONS

Namur Mount Option (w/o flow controls)

- 47A-CXO-H**XXX-XXX**
- A** 1/8" NPTF
 - B** 1/4" NPTF

- 47
- 48P
- 48
- 400
- 92
- 93
- ISO 01
- ISO 02
- ISO 1
- ISO 2
- ISO 3


TECHNICAL DATA

Fluid :	Compressed air, vacuum, inert gases
Pressure range :	Vacuum to 120 PSI
Lubrication :	Not required, if used select a medium aniline point lubricant (between 180°F and 210°F)
Filtration :	40 μ
Temperature range :	0°F to 120°F (-18°C to +50°C)
Flow :	5.2W : (0.50 C _v) – 2.4W : (0.35 C _v) – 1.0W : (0.30 C _v)
Coil :	Class A wire (#22 AWG x 18), continuous duty
Voltage range :	-15% to +10% of nominal voltage
Power :	5.2W – 2.4W – 1.0W
Response times : (with 5.2 W coil)	Energize : 17.4 ms De-energize : 3.8 ms

- Options : • BSPP threads
- Spare parts : • Flow control assembly : N-47004

DIMENSIONS

Dimensions shown are metric (mm)

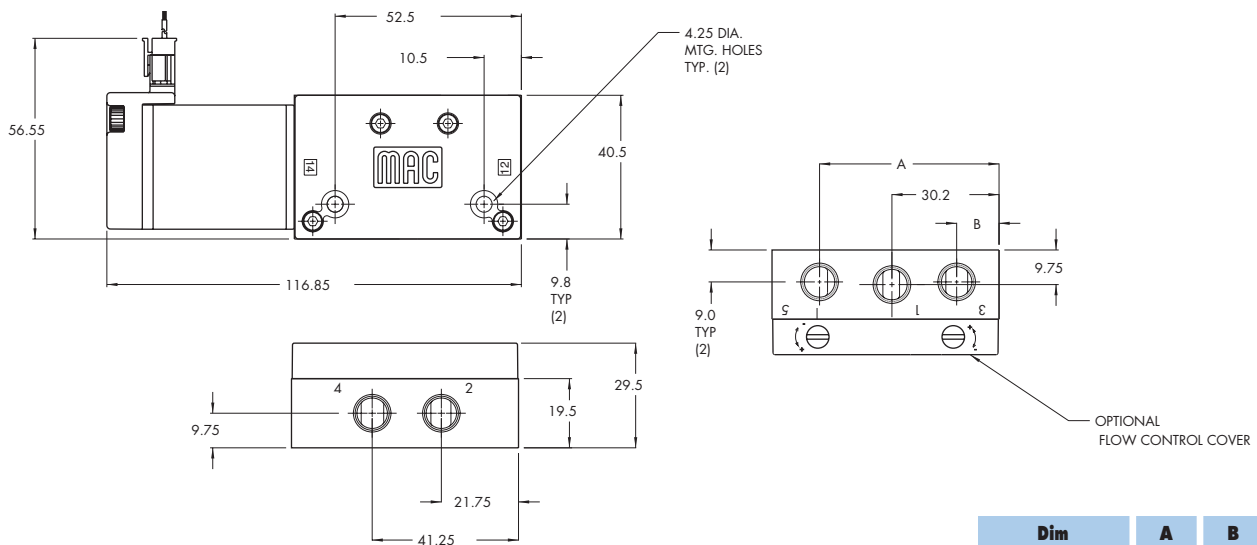

Dim	A	B
1/8"	50.6	11.95
1/4"	49.2	11.2

Function	Port size	Flow [Max]	Individual Mounting	Series
5/2	1/8" - 1/4"	0.5 C_v	Sub-base non "plug-in"	



OPERATIONAL BENEFITS

- Short stroke solenoid produces high energization shifting force.
- High force return spring due to high force solenoid maximizes both energization and de-energization shifting forces.
- Built-in wear compensation – valve stroke is shorter than solenoid stroke.
- Four bonded balanced poppets on a one-piece valve stem.
- End poppets seal first on conical seats and cushion inlet poppet, eliminating cutting.
- Exhaust seals are not under inlet pressure thus reducing friction.
- Integral non-rising flow controls available on inline models.
- Short stroking balanced poppet allows for direct solenoid operation with high shifting forces, minimized friction, fast response and high flow in a small package.



33
34
36
32
37
38
52
67
69
44
46
42

HOW TO ORDER

Port size	Without flow controls	With flow controls
		
Valve less base	47A-L10-H XXX-XXX	47A-L10-H XXX-XXX
1/8" NPTF	47A-LAA-H XXX-XXX	47A-LAB-H XXX-XXX
1/4" NPTF	47A-LBA-H XXX-XXX	47A-LBB-H XXX-XXX

SOLENOID OPERATOR >

H **XXX-XXX***

XX Voltage	X Lead Wire length	X Manual operator	XX Electrical connection
DA 24 VDC (5.2W)	A 18"	1 Non-locking recessed	MA Plug-in wire assembly
DB 24 VDC (2.4W)	B 24"	2 Locking recessed	MC Plug-in wire assembly with light
DC 24 VDC (1.8W)	C 36"		BA Flying leads
DD 24 VDC (1.0W)			BC Flying leads with light
AA 120 VAC (6.7W)			MT Plug-in wire assembly with rectifier & light

47
48P
48
400
92

* Other options available, see page 315.
Note: AC voltage requires connector with rectifier.

LATCHING OPERATOR >

L **XXX-XXX***

XX Voltage	X Lead Wire length	X Manual operator	XX Electrical connection
DA 24 VDC (5.2W)	A 18"	0 No operator	BA 2 Wire Flying leads
DF 12 VDC (5.2W)	B 24"		BJ 4 Wire Flying leads
	C 36"		LA 3 Wire Plug-in (Polarity switching cover)
			MA 2 Wire Plug-in
			ME 4 Wire Plug-in

93
ISO 01
ISO 02
ISO 1
ISO 2
ISO 3

* Other options available, see page 319.


TECHNICAL DATA

Fluid :	Compressed air, vacuum, inert gases
Pressure range :	Vacuum to 120 PSI
Lubrication :	Not required, if used select a medium aniline point lubricant (between 180°F and 210°F)
Filtration :	40 μ
Temperature range :	0°F to 120°F (-18°C to +50°C)
Flow :	5.2W : (0.50 C _v) – 2.4W : (0.35 C _v) – 1.0W : (0.30 C _v)
Coil :	Class A wire (#22 AWG x 18), continuous duty
Voltage range :	-15% to +10% of nominal voltage
Power :	5.2W – 2.4W – 1.0W
Response times : (with 5.2 W coil)	Energize : 17.4 ms De-energize : 3.8 ms

- Options : • BSPP threads
- Spare parts : • Pressure seal body to base: 16628 • Mounting screw (x2): 35043
 • Flow control assembly (x2): N-04001

DIMENSIONS

Dimensions shown are metric (mm)

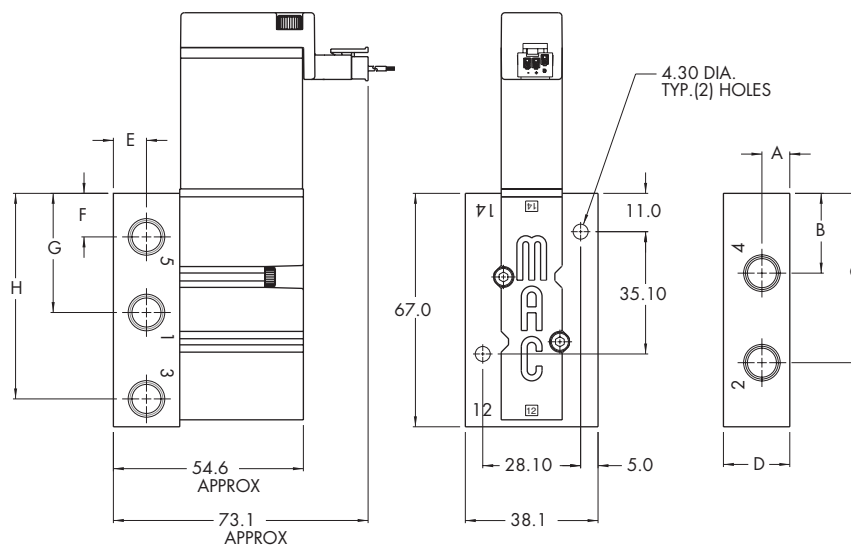

DIM.	A	B	C	D	E	F	G	H
1/8"	8.0	22.9	48.6	19.05	9.5	12.5	34.2	59.0
1/4"	9.5	24.0	48.8	23.0	12.5	12.8	34.2	57.2

Function	Port size	Flow [Max]	Manifold Mounting	Series
5/2	1/8" - 1/4"	0.5 C_v	Stacking	



OPERATIONAL BENEFITS

- Short stroke solenoid produces high energization shifting force.
- High force return spring due to high force solenoid maximizes both energization and de-energization shifting forces.
- Built-in wear compensation – valve stroke is shorter than solenoid stroke.
- Four bonded balanced poppets on a one-piece valve stem.
- End poppets seal first on conical seats and cushion inlet poppet, eliminating cutting.
- Exhaust seals are not under inlet pressure thus reducing friction.
- Integral non-rising flow controls available on inline models.
- Short stroking balanced poppet allows for direct solenoid operation with high shifting forces, minimized friction, fast response and high flow in a small package.



33
34
36
32
37
38
52
67
69
44
46
42

HOW TO ORDER

Port size	Without flow controls	With flow controls
		
1/8" NPTF	47A-SA0-H XXX-XXX	47A-TA0-H XXX-XXX
1/4" NPTF	47A-SB0-H XXX-XXX	47A-TB0-H XXX-XXX

SOLENOID OPERATOR >

H **XXX-XXX***

XX Voltage	X Lead Wire length	X Manual operator	XX Electrical connection
DA 24 VDC (5.2W)	A 18"	1 Non-locking recessed	MA Plug-in wire assembly
DB 24 VDC (2.4W)	B 24"	2 Locking recessed	MC Plug-in wire assembly with light
DC 24 VDC (1.8W)	C 36"		BA Flying leads
DD 24 VDC (1.0W)			BC Flying leads with light
AA 120 VAC (6.7W)			MT Plug-in wire assembly with rectifier & light

* Other options available, see page 315.
Note: AC voltage requires connector with rectifier.

LATCHING OPERATOR >

L **XXX-XXX***

XX Voltage	X Lead Wire length	X Manual operator	XX Electrical connection
DA 24 VDC (5.2W)	A 18"	0 No operator	BA 2 Wire Flying leads
DF 12 VDC (5.2W)	B 24"		BJ 4 Wire Flying leads
	C 36"		LA 3 Wire Plug-in (Polarity switching cover)
			MA 2 Wire Plug-in
			ME 4 Wire Plug-in

* Other options available, see page 319.
End plate kit required: M-47013-01 (1/4" NPTF).

47
48P
48
400
92
93
ISO 01
ISO 02
ISO 1
ISO 2
ISO 3


TECHNICAL DATA

Fluid :	Compressed air, vacuum, inert gases
Pressure range :	Vacuum to 120 PSI
Lubrication :	Not required, if used select a medium aniline point lubricant (between 180°F and 210°F)
Filtration :	40 μ
Temperature range :	0°F to 120°F (-18°C to +50°C)
Flow :	5.2W : (0.50 C _v) – 2.4W : (0.35 C _v) – 1.0W : (0.30 C _v)
Coil :	Class A wires (#22 AWG x 18), continuous duty
Voltage range :	-15% to +10% of nominal voltage
Power :	5.2W – 2.4W – 1.0W
Response times : (with 5.2 W coil)	Energize : 17.4 ms De-energize : 3.8 ms

- Options : • BSPP threads
- Spare parts : • Inlet isolator: 28451 • Exhaust isolator: N-47009 • Tie Rod (x2): 79057

DIMENSIONS

Dimensions shown are metric (mm)

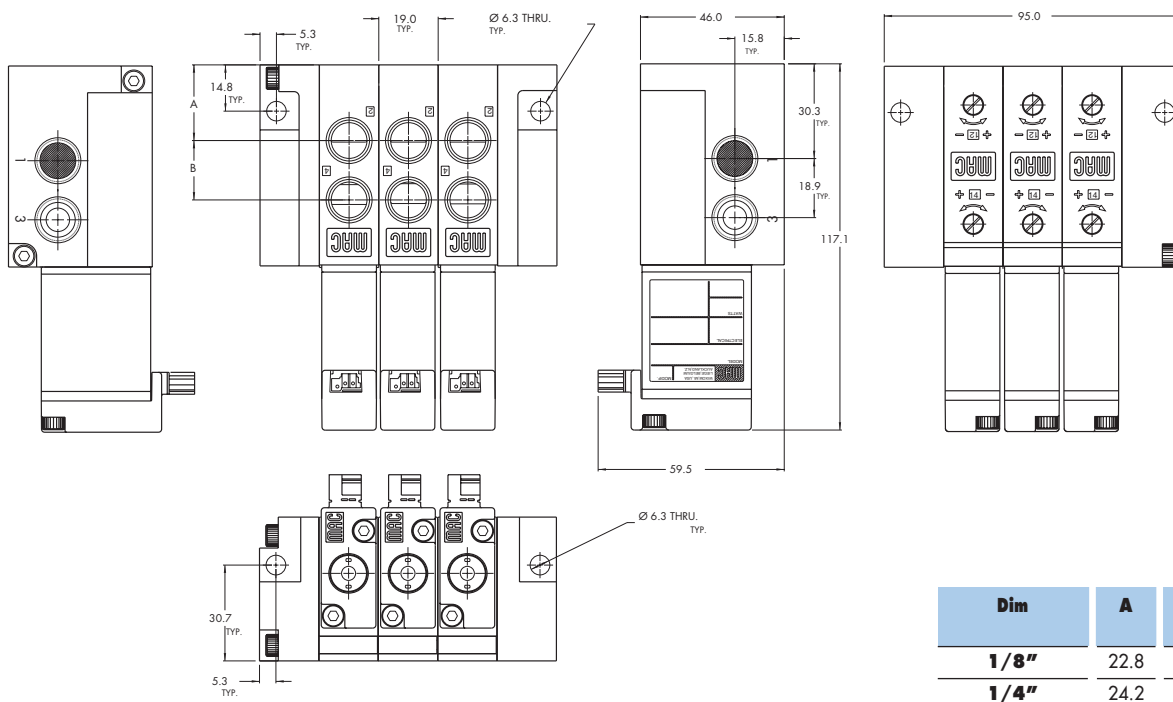



Direct solenoid and solenoid pilot operated valves

Function	Port size	Flow [Max]	Manifold Mounting	Series
5/2	1/8" - 1/4"	0.5 C _v	Manifold base "plug-in"	

OPERATIONAL BENEFITS

- Short stroke solenoid produces high energization shifting force.
- High force return spring due to high force solenoid maximizes both energization and de-energization shifting forces.
- Built-in wear compensation – valve stroke is shorter than solenoid stroke.
- Four bonded balanced poppets on a one-piece valve stem.
- End poppets seal first on conical seats and cushion inlet poppet, eliminating cutting.
- Exhaust seals are not under inlet pressure thus reducing friction.
- Integral non-rising flow controls available on inline models.
- Short stroking balanced poppet allows for direct solenoid operation with high shifting forces, minimized friction, fast response and high flow in a small package.

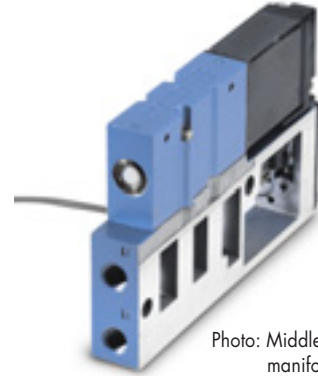


Photo: Middle station manifold base

- 33
- 34
- 36
- 32
- 37
- 38
- 52
- 67
- 69
- 44
- 46
- 42

HOW TO ORDER

Port size	Model number
Valve less base	47A-L10-H XX P- XXX
1/8" NPTF	47A-LAJ-H XX P- XXX
1/4" NPTF	47A-LBJ-H XX P- XXX



SOLENOID OPERATOR >

H **XX** P-**XXX***

XX Voltage	X Manual operator	XX Electrical connection
DA 24 VDC (5.2W)	1 Non-locking recessed	FA Base plug-in
DB 24 VDC (2.4W)	2 Locking recessed	FB Base plug-in w/ ground
DC 24 VDC (1.8W)		FC Base plug-in w/ LED light
DD 24 VDC (1.0W)		FD Base plug-in w/ LED light w/ ground
AA 120 VAC (6.7W)		FT Base plug-in w/ rectifier and light

* Other options available, see page 315.
Note : AC voltage requires connector with rectifier.

- 47
- 48P
- 48
- 400
- 92

LATCHING SOLENOID >

L **XX** P-**XXX***

XX Voltage	X Manual operator	XX Electrical connection
DA 24 VDC (5.2W)	0 No operator	FA Base plug-in w/ ground
DF 12 VDC (5.2W)		FB Base plug-in w/ ground & LED
		FC Base plug-in 4 wire w/ ground
		FD Base Plug-in 4 wire w/ LED & ground

* Other options available, see page 319.

OPTIONS

47A-**xxJ**-**xxx**P-**xxx**

- J Manifold base, side cylinders (middle station)
- K Manifold base, bottom cylinders (middle station)
- L Right end manifold base, side cylinders
- M Right end manifold base, bottom cylinders
- N Left end manifold base, side cylinders
- P Left end manifold base, bottom cylinders

Note: Manifold assemblies consist of (1) left end manifold, (1) right end manifold, and middle station manifolds.

- 93
- ISO 01
- ISO 02
- ISO 1
- ISO 2
- ISO 3


TECHNICAL DATA

Fluid :	Compressed air, vacuum, inert gases
Pressure range :	Vacuum to 120 PSI
Lubrication :	Not required, if used select a medium aniline point lubricant (between 180°F and 210°F)
Filtration :	40 μ
Temperature range :	0°F to 120°F (-18°C to +50°C)
Flow (at 6 bar, ΔP=1bar) :	5.2W : (0.50 C _v) – 2.4W : (0.35 C _v) – 1.0W : (0.30 C _v)
Coil :	Class A continuous duty, #22 AWG x 12 base leads
Voltage range :	-15% to +10% of nominal voltage
Power :	5.2W – 2.4W – 1.0W
Response times : (with 5,2 W coil)	Energize : 17.4 ms De-energize : 3.8 ms

- Options : • BSPP threads • Sandwich flow control: FC47A-AA • Sandwich regulator: see "Regulator" section
- Spare parts : • Inlet/exhaust isolator: 28447 • Valve cover plate: M-47001

DIMENSIONS

Dimensions shown are metric (mm)

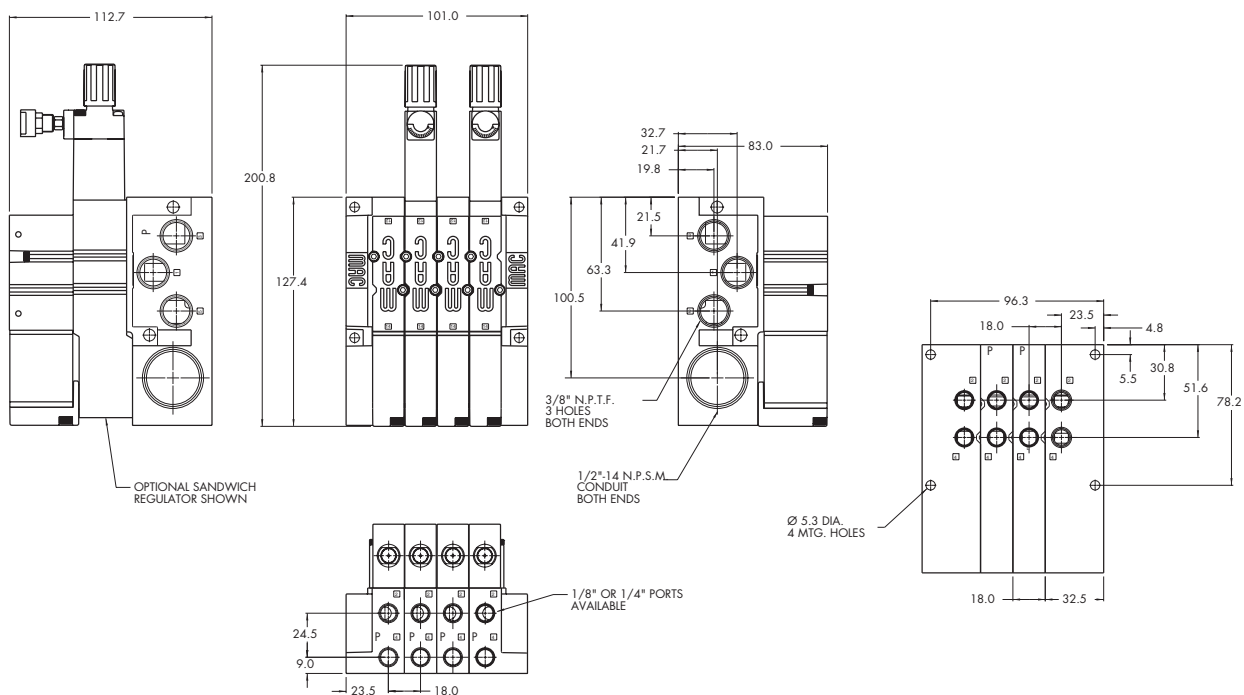



Codification table for voltages / Manual operators / Electrical connections

VALVE CODE > **H XX X-X XX**
1 2 3 4

OPTIONS AVAILABLE FOR

- Solenoid valves 37 & 47 Series

1. VOLTAGE

H-XX X-X XX	VOLTAGE
AA	120/50, 120/60 (6.7 W) (use connector with rectifier)
AB	220/50, 220/60 (5.6 W) (use connector with rectifier)
AC	240/50, 240/60 (5.8 W) (use connector with rectifier)
AD	24/50, 24/60 (7.8 W) (use connector with rectifier)
DA	24 VDC (5.2 W)
DB	24 VDC (2.4 W)
DC	24 VDC (1.8 W)
DD	24 VDC (1.0 W)
DF	12 VDC (5.2 W)
DG	12 VDC (2.4 W)
DH	12 VDC (1.8 W)
DJ	12 VDC (1.0 W)
DL	120 VDC (6.3 W)

2. WIRE LENGTH

H-XX X-X XX	WIRE LENGTH
0	No lead wire (use with "MJ, MM & K Type connectors)
A	18"
B	24"
C	36"
D	48"
E	72"
F	96"
G	120"
H	144"

3. MANUAL OPERATOR

H-XX X-X XX	MANUAL OPERATOR
0	No operator
1	Non-locking recessed
2	Locking recessed
3	Non-locking extended
4	Locking extended

4. ELECTRICAL CONNECTION

H-XX X-X XX	ELECTRICAL CONNECTION
BA	Flying leads
BB	BA with ground wire
BC	BA with light
BD	BA with light & ground wire
BE	BA with suppression diode
BF	BA with suppression diode & ground wire
BG	BA with suppression diode plus light
BH	BA with suppression diode plus light & ground wire
*BN	BA with suppression diode plus blocking diode
*BP	BA with suppression diode plus blocking diode & ground wire
*BR	BA with suppression diode plus blocking diode & light
*BS	BBA with suppression diode plus blocking diode & light & ground wire
BK	BA with full wave rectifier

H-XX X-X XX	
BL	BA with full wave rectifier & ground wire
BT	BA with full wave rectifier plus light
BU	BA with full wave rectifier plus light & ground wire

H-XX X-X XX	PLUG-IN CONNECTOR
FA	Base plug-in
FB	FA with ground wire
FC	FA with light
FD	FA with light & ground wire
FE	FA with suppression diode
FF	FA with suppression diode & ground wire
FG	FA with suppression diode & light
FH	FA with suppression diode plus light & ground wire
FK	FA with full wave rectifier
FL	FA with full wave rectifier & ground wire
*FN	FA with suppression diode plus blocking diode
*FP	FA with suppression diode plus blocking diode & ground wire
*FR	FA with suppression diode plus blocking diode plus light
*FS	FA with suppression diode plus blocking diode & light & ground wire
FT	FA with full wave rectifier plus light
FU	FA with full wave rectifier plus light & ground wire
MA	Solenoid plug-in wire assembly
MB	MA with ground wire
MC	MA with light
MD	MA with light & ground wire
ME	MA with suppression diode
MF	MA with suppression diode & ground wire
MG	MA with suppression diode plus light
MH	MA with suppression diode plus light & ground wire
MK	MA with full wave rectifier
ML	MA with full wave rectifier & ground wire
*MN	MA with suppression diode plus blocking diode
*MP	MA with suppression diode plus blocking diode & ground wire
*MR	MA with suppression diode plus blocking diode & light
*MS	MA with suppression diode plus blocking diode & light & ground wire
MT	MA with full wave rectifier plus light
MU	MA with full wave rectifier plus light & ground wire
MJ	Plug-in housing without wire assembly ('MA' option without wire assembly)
MM	Plug-in housing without wire assembly ('MB' option without wire assembly)
KA	Mini square connector
KB	KA with suppression diode
KC	KA with M.O.V.
KD	KA with light
KE	KA with light & suppression diode
KF	KA with light & M.O.V.
KJ	Mini square connector – male only
KK	KJ with suppression diode
KL	KJ with M.O.V.
KM	KA with full wave rectifier
KN	KA with full wave rectifier & M.O.V.
KP	KA with full wave rectifier & light
KR	KA with full wave rectifier plus light & M.O.V.
KS	KJ with full wave rectifier

* Blocking diode is located in the lead wire



Codification table for voltages / Manual operators / Electrical connections

VALVE CODE > $L \frac{XX}{1} \frac{X-X}{23} \frac{XX}{4}$

OPTIONS AVAILABLE FOR

- Solenoid valves 32, 38, 42, 44, 47 & 48 Series

1. VOLTAGE (32, 38, 42, 44, 48 SERIES)		1. VOLTAGE (47 SERIES)	
L-XX X-X XX	VOLTAGE	L-XX X-X XX	VOLTAGE
DF	24VDC (4.0W)	DA	24VDC (5.2W)
DN	12VDC (4.0W)	DF	12VDC (5.2W)
HA	24VDC (1.95W)		
HE	12VDC (1.95W)		

2. WIRE LENGTH (all series)	
L-XX X-X XX	WIRE LENGTH
O	No lead wire
A	18"
B	24"
C	36"
D	48"
E	72"
F	96"
G	120"
H	144"

3. MANUAL OPERATOR (all series)	
L-XX X-X XX	MANUAL OPERATOR
O	No operator

4. ELECTRICAL CONNECTOR (32, 38, 42, 44 & 48 series)	
L-XX X-X XX	NON PLUG-IN
BA	2 wire flying leads
BB	2 wire flying leads with ground wire
BC	2 wire flying leads with light
BD	2 wire flying leads with light & ground wire
BJ	4 wire flying leads
BK	4 wire flying leads with ground
BL	4 wire flying leads with light
BM	4 wire flying leads with light & ground wire
KA	2 wire plug-in assembly
KB	2 wire plug-in assembly with ground wire
KC	2 wire plug-in assembly with light
KD	2 wire plug-in assembly with light and ground wire
KE	4 wire plug-in assembly
KF	4 wire plug-in assembly with ground wire
KG	4 wire plug-in assembly with light
KH	4 wire plug-in assembly and ground wire
LA	3 wire plug-in assembly (polarity switching cover)
L-XX X-X XX	PLUG-IN
*DA	Base plug-in
*DB	Base plug-in with ground pin
*DC	Base plug-in with light
*DD	Base plug-in with light & ground pin
**EA	Base plug-in 3 pin (Polarity switching cover)

4. ELECTRICAL CONNECTOR (47 series)	
L-XX X-X XX	NON PLUG-IN
BA	2 wire flying leads
BB	2 wire flying leads with ground wire
BC	2 wire flying leads with light
BD	2 wire flying leads with light & ground wire
BJ	4 wire flying leads
BK	4 wire flying leads with ground
BL	4 wire flying leads with light
BM	4 wire flying leads with light & ground wire
LA	3 wire plug-in assembly (Polarity switching cover)
MA	2 wire plug-in assembly
MB	2 wire plug-in assembly with ground wire
MC	2 wire plug-in assembly with light
MD	2 wire plug-in assembly with light and ground wire
ME	4 wire plug-in assembly
MF	4 wire plug-in assembly with ground wire
MG	4 wire plug-in assembly with light
MH	4 wire plug-in assembly with light and ground wire
L-XX X-X XX	PLUG-IN
EA	Base plug-in 3 pin (Polarity switching cover)
FA	Base plug-in with ground
FB	Base plug-in with ground & light
FC	Base plug-in 4 wire with ground
FD	Base plug-in 4 wire with light & ground

* Use these options for plug-in base with 2 or 4 wire assemblies

** Use this option for plug-in bases with 3 wire assemblies