


[®]
MAC

VALVES



SERIAL INTERFACE
BUS COMPATIBLE SYSTEMS

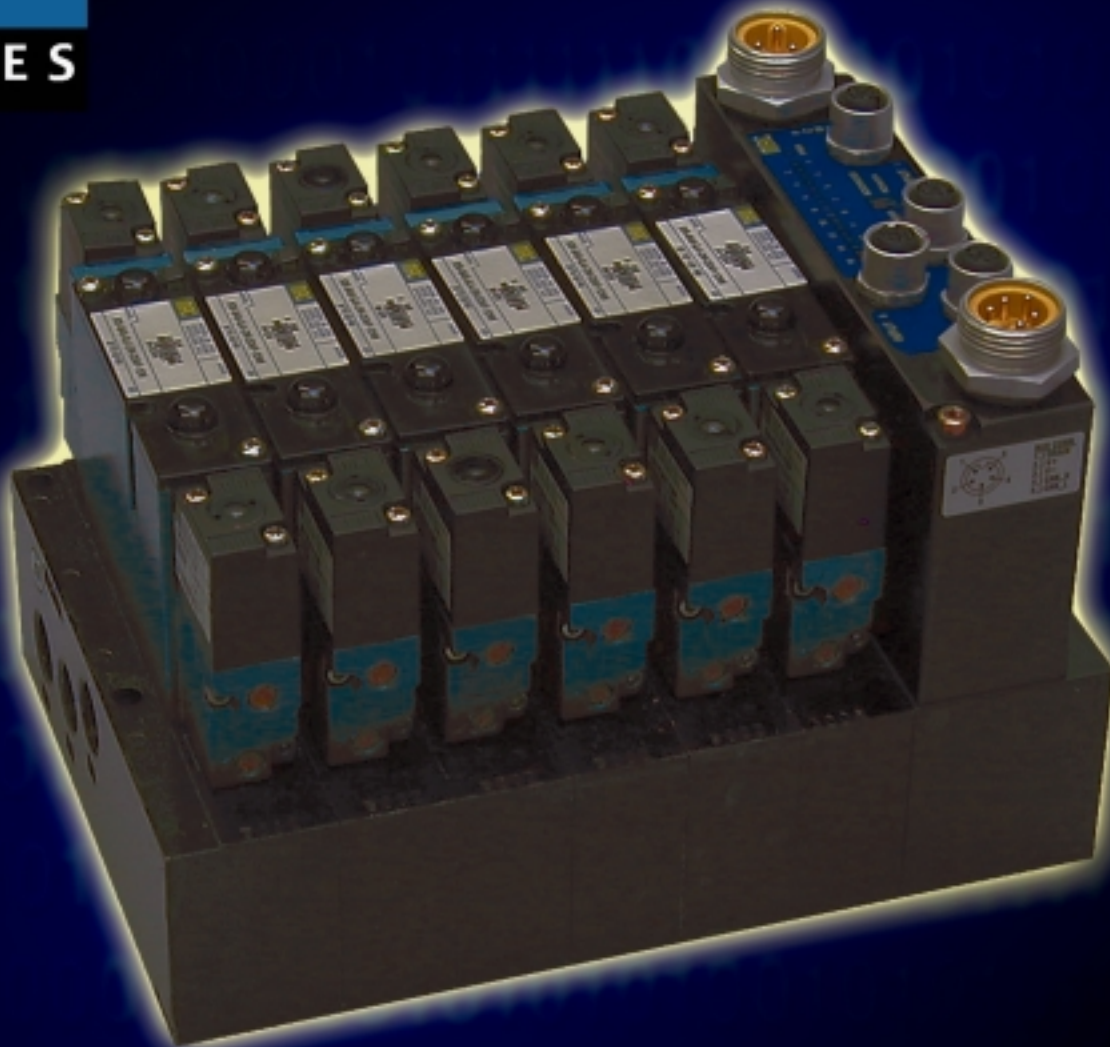

SM 32

SM32 SHOWN WITH 92 SERIES



REMOTE STACK

INPUT/OUTPUT MODULES

TETHERED INPUT/OUTPUT MODULES



BENEFITS

1. Ability to interface with the MAConnect™ system
2. Ease of installation
3. Reduction in wiring costs
4. Washdown capability

INPUTS

4 on Serial Module
 Up to 16 on Tethered Module
 Up to 16 (4 Per Add-A-Unit Module)

OUTPUTS

16 Solenoids Possible
 Up to 16 Outputs on Tethered Module
 4 Outputs On Add-A-Unit Module

PROTOCOLS

DeviceNet
 Remote I/O
 InterBus
 Profibus
 * AS-I

* AS-I has up to 8 input/8 output capability




SM 32

**TECHNICAL
D A T A**

OUTPUTS :	NUMBER: 16 CHANNELS / SOLENOIDS ON MANIFOLD VOLTAGE / CURRENT: 24 VDC / .225A PER CHANNEL (5.4 WATTS MAX)
INPUTS :	NUMBER: 16 TYPE: 24 VDC NPN OR PNP LOGIC
PROTOCOLS :	DEVICENET, ALLEN-BRADLEY REMOTE I/O, PROFIBUS DP, INTERBUS, AS-I
CURRENT CONSUMPTION :	OUTPUTS - 4 A MAX. ELECTRONICS AND INPUTS 75 mA
SUPPLY VOLTAGE :	OPERATING WITH SINGLE SUPPLY: 24 VDC \pm 10% OPERATING SEPARATE SUPPLY FOR VALVES: 24 VDC \pm 10%
OPERATING TEMPERATURE :	0°-50° C (32° -120° F) 10-90% RH (NON-CONDENSING)
ENCLOSURE :	DESIGNED TO MEET NEMA4 WITH VALVES BUILT TO WASHDOWN MOD
WELDING VERSION :	ABILITY TO INTERFACE TO WATER SAVER VALVES ABILITY TO CONTROL A MAC PROPORTIONAL PRESSURE CONTROLLER (PPC)


DIMENSIONS

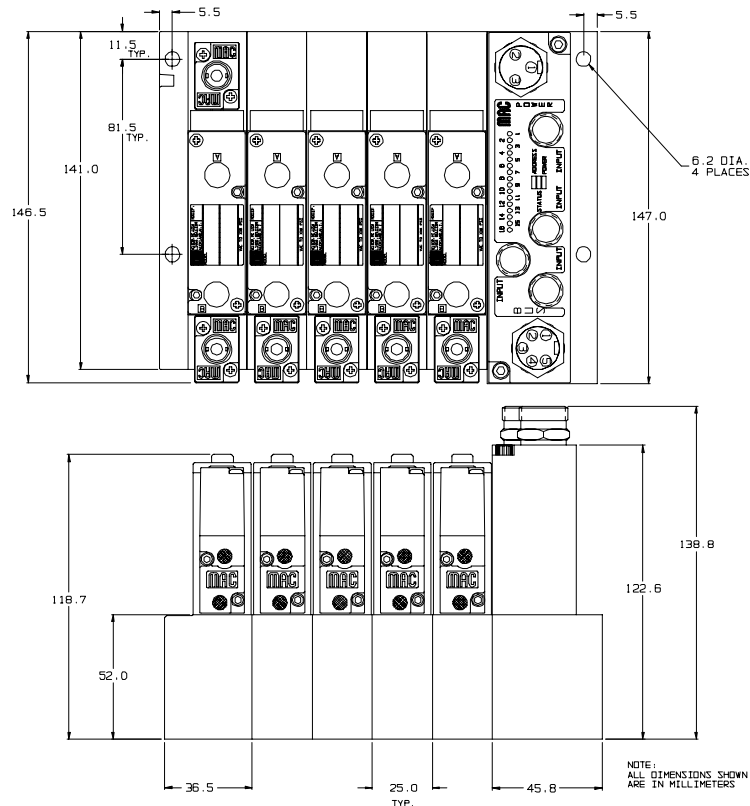

MAC

SM 16

SM16 SHOWN WITH 44 SERIES

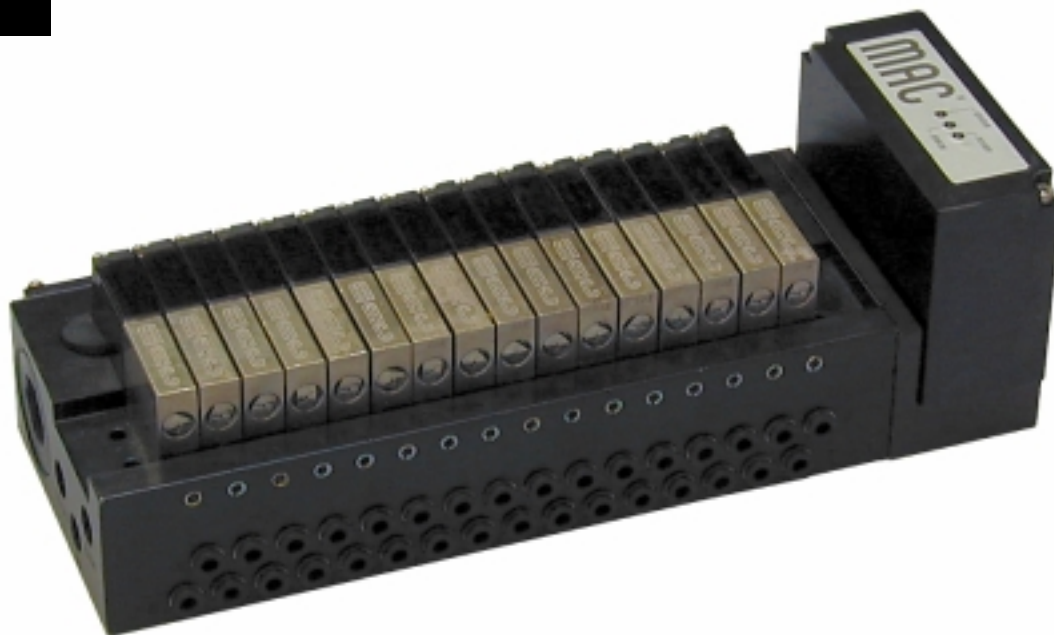

BENEFITS

1. Ability to interface with the MACConnect™ system
2. Ease of installation
3. Reduction in wiring costs
4. Washdown capability for approved valve series.
5. Small envelope size

INPUTS

None

OUTPUTS

16 Solenoids

PROTOCOLS

DeviceNet




SM 16

TECHNICAL

D A T A


OUTPUTS :	NUMBER: 16 CHANNELS / SOLENOIDS ON MANIFOLD VOLTAGE / CURRENT: 24 VDC / .225A PER CHANNEL (5.4 WATTS MAX)
INPUTS :	NUMBER: NONE
PROTOCOLS :	DEVICENET
CURRENT CONSUMPTION :	OUTPUTS - 4A MAX. ELECTRONICS 75 MA
SUPPLY VOLTAGE :	OPERATING WITH SINGLE SUPPLY: 24 VDC ±10% OPERATING WITH SEPARATE POWER SUPPLY FOR VALVES: 24VDC ±10%
OPERATING TEMPERATURE :	0°-50° C (32° -120° F) 10-90% RH (NON-CONDENSING)
ENCLOSURE :	DESIGNED TO MEET NEMA 4 WITH VALVES BUILT TO WASHDOWN MOD

DIMENSIONS

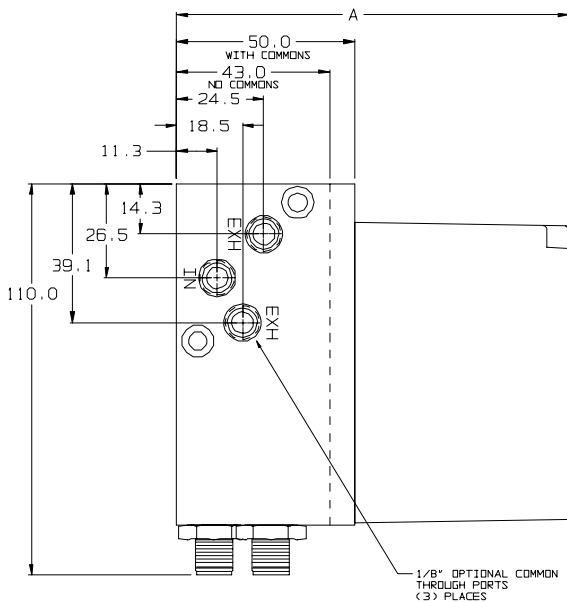

TYPE OF BLOCK	DIM A
WITH COMMONS	110.2
WITHOUT COMMONS	103.2

NOTE:
ALL DIMENSIONS
SHOWN ARE IN
MILLIMETERS

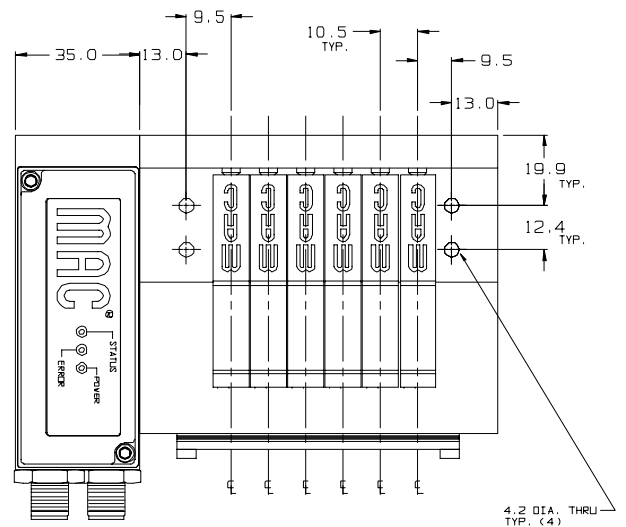

SIM SHOWN WITH 92 SERIES



BENEFITS

1. Ability to easily add input/output modules in the field
2. Ease of installation
3. Reduction in wiring costs
4. Washdown capability

INPUTS

Up to 32 Input Capacity
(8 Inputs per Module)

OUTPUTS

24 Solenoids on Valve Stack
8 Additional Outputs Possible
(4 Outputs per Module)

PROTOCOLS


DeviceNet
Remote I/O
InterBus
Profibus

TECHNICAL

D A T A

OUTPUTS :	NUMBER: 24 CHANNELS / SOLENOIDS ON MANIFOLD 4 CHANNELS / SOLENOIDS PER OUTPUT MODULE (2 MODULES MAX.) TOTAL OUTPUTS: 32 CHANNELS / SOLENOIDS VOLTAGE / CURRENT: 24 VDC / .25A PER CHANNEL (6 WATTS MAX)
INPUTS :	NUMBER: 8 CHANNELS PER INPUT MODULE (4 MODULES MAX.) TOTAL INPUTS: 32 CHANNELS MODULES: POSITIVE COMMON NEGATIVE COMMON (BASED ON DIRECTION OF CURRENT) NOTE: MODULES TO BE INSTALLED AS INDICATED ON BASE UNIT
PROTOCOLS :	ALLEN-BRADLEY REMOTE I/O, DEVICENET, PROFIBUS DP, INTERBUS
CURRENT CONSUMPTION :	INTERNAL SERIAL INTERFACE - 300 mA MAX. OUTPUTS - 8A MAX. INPUTS - 3A MAX.
SUPPLY VOLTAGE :	OPERATING WITH SINGLE SUPPLY: 24 VDC ±10% OPERATING WITH INTERNAL SIM ON SEPARATE SUPPLY: 24 VDC ±10%
WEIGHT :	3.60 Kg (7.94 LB.) WITH 6 MODULES AND VALVE ADAPTER
OPERATING TEMPERATURE :	0°-50° C (32° -120° F) 10-90% RH (NON-CONDENSING)
ENCLOSURE :	DESIGNED TO MEET NEMA 4 WITH VALVES BUILT TO WASHDOWN MOD

DIMENSIONS

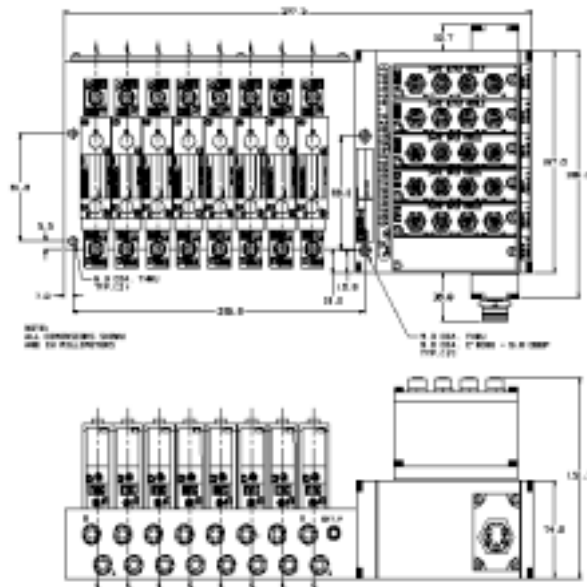

MAC

SLIM

SLIM SHOWN WITH 92 SERIES



BENEFITS

1. Ease of installation
2. Reduction in wiring costs
3. Washdown capability

INPUTS

None

OUTPUTS

Up to 32 Solenoids

PROTOCOLS


DeviceNet
Remote I/O
InterBus
Profibus

TECHNICAL

D A T A


OUTPUTS :	NUMBER: 32 CHANNELS / SOLENOIDS ON MANIFOLD VOLTAGE / CURRENT: 24 VDC / .25A PER CHANNEL (6 WATTS MAX)
INPUTS :	NUMBER: NONE
PROTOCOLS :	ALLEN-BRADLEY REMOTE I/O, DEVICENET, PROFIBUS DP, INTERBUS
CURRENT CONSUMPTION :	INTERNAL SERIAL INTERFACE - 300 mA MAX. OUTPUTS - 8A MAX.
SUPPLY VOLTAGE :	OPERATING WITH SINGLE SUPPLY: 24 VDC ±10% OPERATING WITH INTERNAL SLIM ON SEPARATE SUPPLY: 24 VDC ±10%
WEIGHT :	2.10 KG (4.62 LB.)
OPERATING TEMPERATURE :	0°-50° C (32° -120° F) 10-90% RH (NON-CONDENSING)
ENCLOSURE :	DESIGNED TO MEET NEMA 4 WITH VALVES BUILT TO WASHDOWN MOD

DIMENSIONS

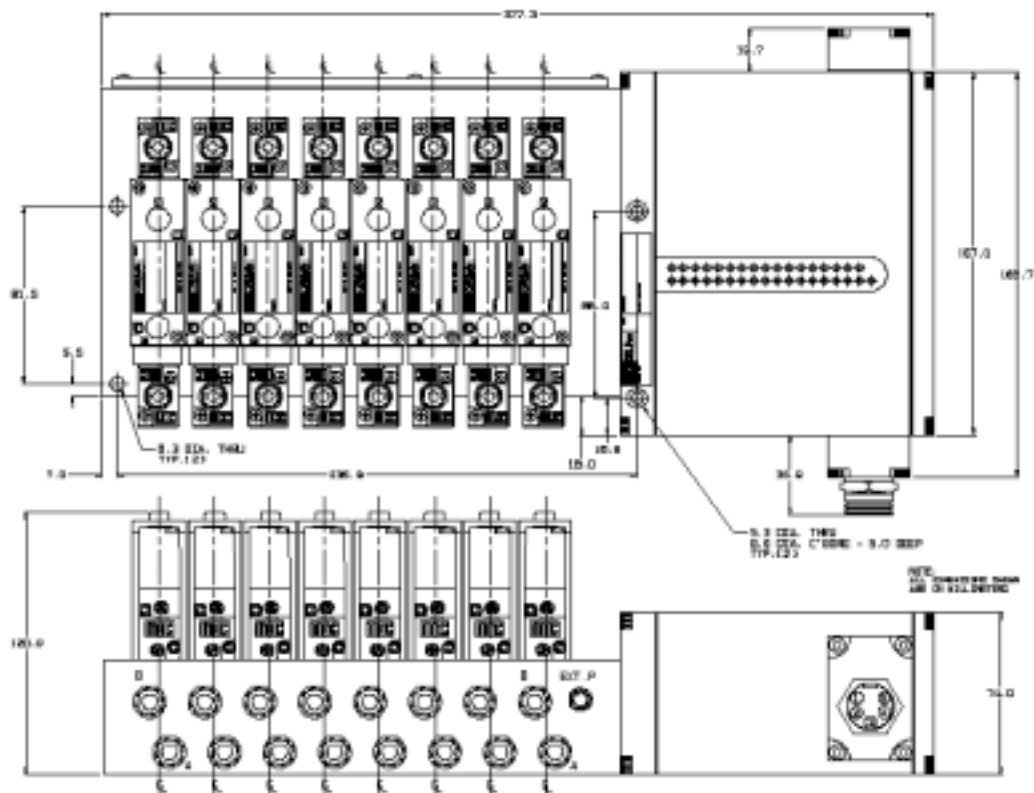



ADDRESSABLE VALVE SHOWN WITH 92 SERIES

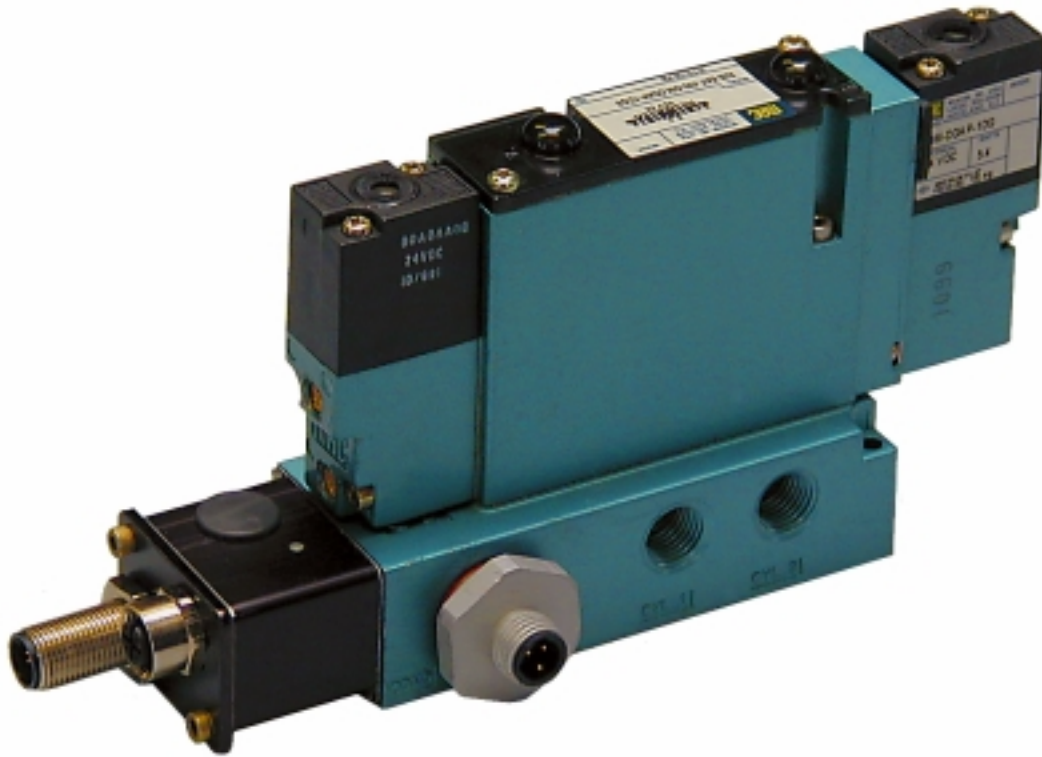

BENEFITS

1. Ability to add a remote valve to a bus network
2. Ease of installation
3. Reduction in wiring costs
4. Washdown capability

INPUTS

2 Input Optional

OUTPUTS

1 Single or Double Solenoid Valve

PROTOCOL

DeviceNet




ADDRESSABLE VALVES

TECHNICAL DATA

OUTPUTS :	NUMBER: 2 CHANNELS / SOLENOIDS VOLTAGE / CURRENT: 24 VDC / .225A PER CHANNEL (5.4 WATTS PER CHANNEL)
INPUTS :	NUMBER: 2 (OPTIONAL) TYPE: 24 VDC NPN OR PNP LOGIC
PROTOCOLS :	DEVICENET
CURRENT CONSUMPTION :	OUTPUTS ≈ .225A INPUTS ≈ .020A ELECTRONICS ≈ .030A
SUPPLY VOLTAGE :	OPERATING WITH SINGLE BUS SUPPLY: 24 VDC ±10% (WHERE PROTOCOL ALLOWS) OPERATING WITH SEPARATE POWER SUPPLY FOR VALVES AND INPUTS: 24 VDC ±10%
OPERATING TEMPERATURE :	0°-50° C (32° -120° F) 10-90% RH (NON-CONDENSING) HIGH TEMPERATURE APPLICATIONS: CONSULT FACTORY
ENCLOSURE :	DESIGNED TO MEET NEMA 4 WITH VALVES BUILT TO WASHDOWN MOD
AVAILABLE VALVES :	35, 37, 45, 47, 82, 92, 93, 100, 800, 900, ISO 1, ISO 2, ISO 3, 6200, 6300, 6500, AND 6600 SERIES VALVES

DIMENSIONS

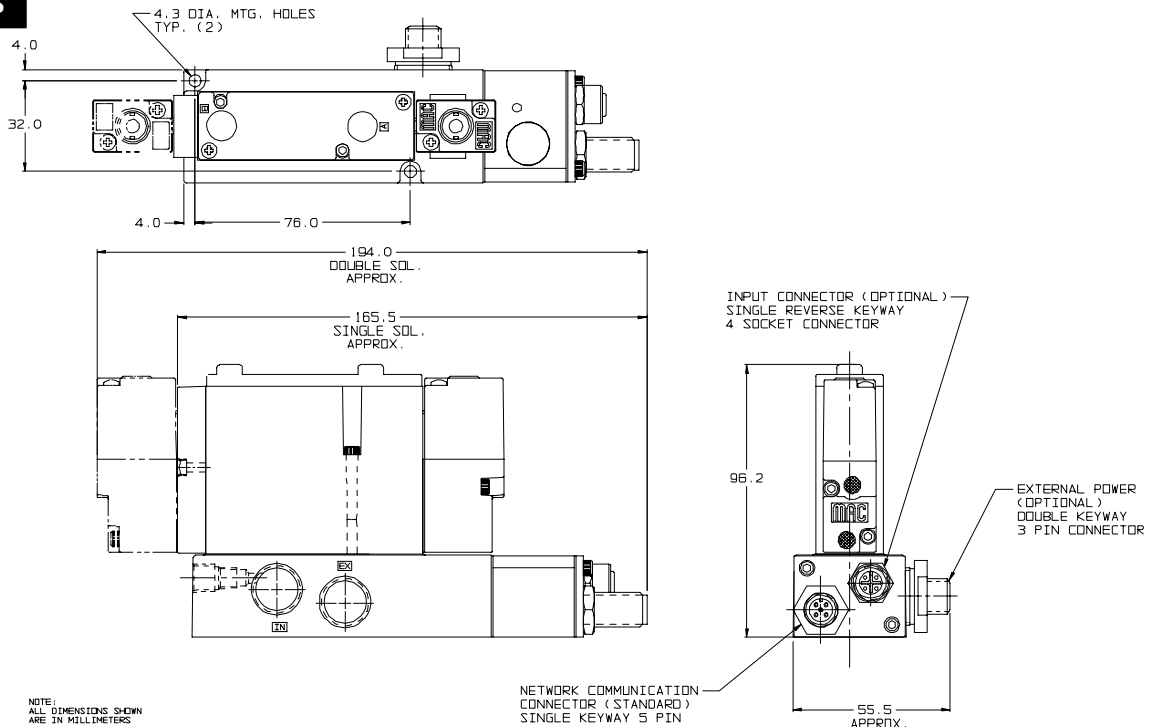

MAC

VALVES

MAC VALVES, INC.
P.O. Box 111
30569 Beck Road
Wixom, Mi. 48393-7011

Tel: 1-800-MAC VLVS
Tel: 1-248-624-7700
Fax: 1-248-624-0549
E-mail: mac@macvalves.com
WebSite: www.macvalves.com

MAC VALVES EUROPE, INC.
Rue Marie Curie, 12
B-4431 Ans (Liege)
Belgium

Tel: 32 (4) 239 68 68
Fax: 32 (4) 263 19 42
E-Mail: info@macvalves.be

MAC VALVES PACIFIC, INC.
P.O. Box 12221
Penrose, Auckland
New Zealand

Tel: 64 (9) 634-9400
Fax: 64 (9) 634-9401
E-Mail: macvalves@xtra.co.nz

MAC VALVES, INC.
5275 Ann Arbor Rd.
Dundee, Mi. 48131

Tel: 1-743-529-5099
Fax: 1-743-529-5902



Installation and Service Precautions:

- Do not install or service MAC valves without first making sure both air and electrical power to the machine are off and that all air has been completely bled from the system.
- MAC valves should only be installed and/or serviced by qualified knowledgeable personnel who understand how the specific valve is to be pneumatically piped and electrically connected (where applicable). Flow paths through the valve are shown in the catalog and on the valve by use of ANSI or ISO type standard and graphic symbols. Do not install unless these symbols and the valve functions and operations are thoroughly understood.
- Before service, maintenance, repair or cleaning, consult local distributor or factory for Parts and Operation Sheet and information on proper cleaning and lubrication agents. Do not subject MAC valves' parts to any foreign substance including lubricants and cleaning agents not specifically recommended by MAC Valves, Inc.
- MAC valves are never to be stepped on while working on a machine. Damage to the valve, or lines to the valve (either air or electrical lines) or accidental activating of a manual operator on the valve could result in a dangerous condition.

Warning:

- Under no circumstances are MAC valves to be used in any application where failure of the valve to operate as intended could jeopardize the safety of the operator or any other person.
- Do not operate outside of the pressure range listed on valve label or outside of designated temperature range.
 - Air supply must be clean. Contamination of valve can affect proper operation.
 - Before attempting to repair, adjust or clean valve, consult catalog, parts and operation sheet, or factory for proper maintenance procedures, lubrication, and cleaning agents. Never attempt to repair or perform other maintenance with air pressure to valve.
 - If airline lubrication is used, consult catalog, parts and operation sheet, or factory for recommended lubricants.