
Intrinsically Safe Valves



## HOW TO ORDER

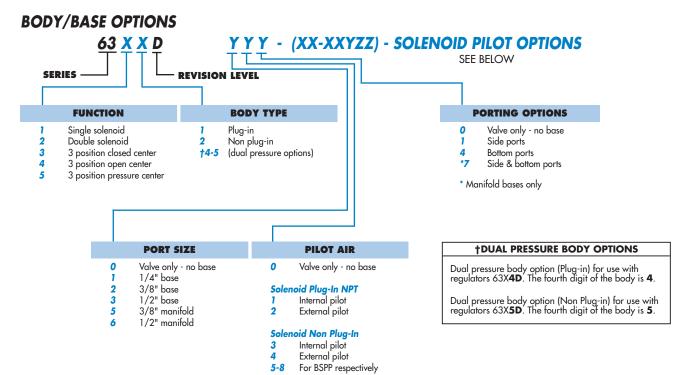

## **PILOT VALVE OPTIONS**

			XX	- <b>XXYZ</b>	2		
ХХ	PILOT EXHAUST	ХХ	DC VOLTAGE	Y	MANUAL OPERATOR	ZZ	ELECTRICAL CONN.
FM FP	Muffled exhaust Piped exhaust	A5 A6	12 VDC (0.6 W) 24 VDC (0.6 W)	0 1 2 3 4	No operator Non-locking Recessed (std.) Locking Recessed Non-locking Extended Locking Extended	DA Non BA CA JB JM JA JJ	Plug-in (standard) <b>Plug-in</b> Grommet Conduit 1/2" NPS Rectangular Plug-in Rectangular Male only Square Male only
MOD 021	O Bottom inlet port in addition		et port (manifolds only)				

TO ORDER: 6311D-511-FM-A51DA MOD 0210

Manifold Accesories: Inlet Isolators #32839. Exhaust Isolator #28309.

NOTE: 1. The valve less base is always the same for internal or external pilot. These options are effected in the base or manifold.

2. When ordering an external pilot connection for manifold bases, a common external pilot is standard. One connection only is required for all the valves in the manifold whether single or double solenoid.